

# AIR GUNS





P. 573 /  
CAF AIR GUNS



P. 575 /  
CB AIR GUNS BIG FLOWRATE



P. 577 /  
PSF ALUMINUM AIR GUNS



P. 581 /  
CPA PLASTIC AIR BLOW GUN  
WITH BRASS INSERTION




P. 585 /  
UGPT-7 COMB BLOW COMPRESSED AIR



P. 587 /  
SAFETY CPOH AIR BLOW GUN  
OSHA COMPLIANT

# TECHNICAL INDEX

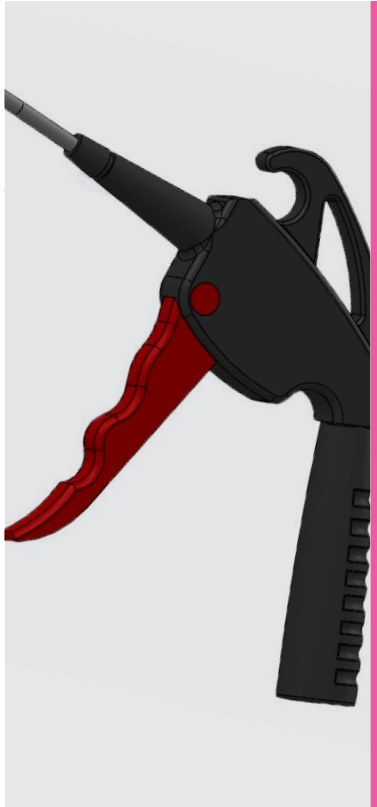

From 0°C to 60°C



from 0 to 10 Bar  
**Negative pressure:** -750 mmHg



Compressed air



Parallel gas BSPP - G1/4"

### SUPPLY

Progressive



Plastic and steel




Products in compliance with the directive 2002/95/EC

### RoHS2


Products in compliance with the directive 2011/65/EU

### FLOWRATE

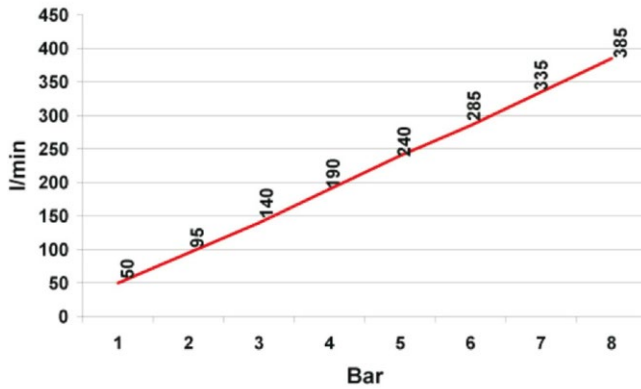

### CAF

Air gun with steel nozzle & plastic BSPP thread

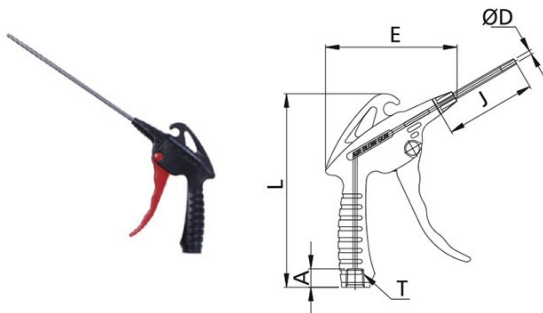

CODE	ØD	T	L	E	A	J	GR.
CAF005FG	3,0	G1/4"	142,1	96,8	13,5	50,0	93,0
CAF010FG	3,0	G1/4"	142,1	96,8	13,5	100,0	106,0
CAF020FG	3,0	G1/4"	142,1	96,8	13,5	200,0	113,0
CAF030FG	3,0	G1/4"	142,1	96,8	13,5	300,0	128,0

# AIR GUNS

## CB BIG FLOWRATE

### PLUS

---

**BIG FLOWRATE**

---

**EASY HANDLE**

---

**LIGHT AND EASY TO USE**

---

**DIFFERENT RANGE OF MODEL**



p. 576 / **CB01**

---



From 0°C to 60°C



from 0 to 10 Bar  
**Negative pressure:** -750 mmHg



Compressed air



Parallel gas BSPP - G1/4"

### SUPPLY

Progressive



Plastic and steel




Products in compliance with the directive 2002/95/EC

### RoHS2


Products in compliance with the directive 2011/65/EU

### FLOWRATE

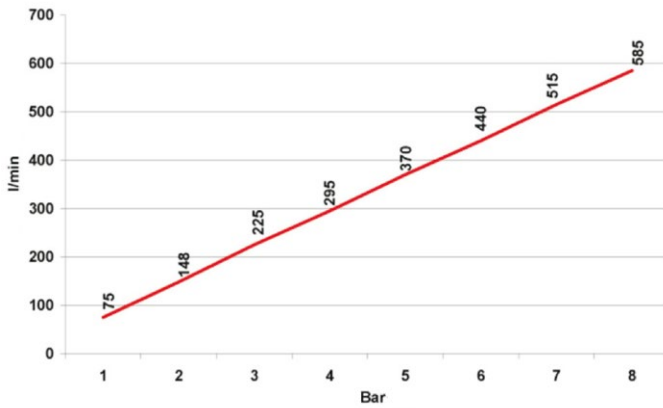

### CBO1

Big flowrate air gun with steel nozzle & plastic BSPP thread

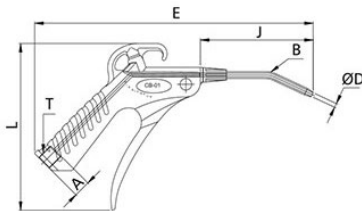

CODE	ØD	T	L	E	A	J	B	GR.
CB01F010FG	3,5	G1/4"	143,6	242,7	13,5	100,0	BENT	118,0
CB01F020FG	3,5	G1/4"	143,6	342,7	13,5	200,0	STRAIGHT	132,0
CB01F030FG	3,5	G1/4"	143,6	442,7	13,5	300,0	STRAIGHT	147,0

# **AIR GUNS**

## PSF ALUMINUM

**PLUS**

**EASY HANDLE**

---

**LIGHT AND EASY TO USE**

---

**IN ALUMINUM**



12 Bar

Compressed air, water, grease,  
oil and fluids compatible with  
construction material

Parallel gas BSPP - G1/4"

**SUPPLY**

Progressive

**FLOW**

210 l/min at 6 Bar

Products in compliance with  
the directive 2002/95/EC**RoHS2**Products in compliance with  
the directive 2011/65/EU**ADVANTAGES**Suitable for each kind of industry as it's used for  
cleaning elements which contain dust, bacteria  
and oils.**Body:** painted aluminum**Button:** PA-11**Standard nozzle:** NBR**Seals:** NBR**Spring:** inox AISI 302**L150&L225:** brass**PSF 1010-4:** NBR

## PSF

Aluminum air gun with female BSPP thread



CODE	THREAD	ESTIMATED DIMENSION	GR.
PSF1010	G1/4"	120 X 62 X 25	110

## L150&L225

Brass nozzles for PSF 1010



CODE	LENGHT	THREAD	GR.
L-150	158	G1/8"	35
L-225	233	G1/8"	45

## PSF1010-4

NBR nozzle for PSF 1010



CODE	LENGHT	THREAD	GR.
PSF1010-4	20	G1/8"	2



# **AIR GUNS**

CPA PLASTIC AIR  
BLOW GUN WITH  
BRASS INSERTION

**PLUS**

**LIGHT AND EASY TO USE**

---

**DIFFERENT ACCESSORIES**

---

**BODY IN PLASTIC**



-25°C ÷ +85°C



10 Bar



Compressed air



Parallel gas BSPP - G1/4"

## SUPPLY

Progressive



**Body:** plastic

**Thread:** brass



Products in compliance with the directive 2002/95/EC

## RoHS2

Products in compliance with the directive 2011/65/EU

## BLOWING FORCE AT 6 BAR

300 gr.

## USE AT 3,5 BAR

6 Nm<sup>3</sup>/h

## SONOROUS EMISSION AT 3,5 BAR

78 dB

## FEATURES

Progressive regulation of the air flow ergonomic grip. Light and sturdy body.

**CPA**

Blue plastic air blow gun with brass insertion



CODE	T	GR.
CPA010FG	G1/4"	98

**UG**

Curved nozzle for CPA010FG



CODE	L	T
UG100	100	G1/4"
UG150	150	G1/4"
UG250	250	G1/4"
UG400	400	G1/4"

**UGPR**

Parable nozzle with save screen for CPA010FG



CODE	L	T
UGPR	80	G1/4"



from 0 to 77°C



7 Bar



Compressed air



Male taper gas BSPT R1/4"



ABS Plastic



Products in compliance with the directive 2002/95/EC

**RoHS2**

Products in compliance with the directive 2011/65/EU

**FEATURES**


Generate efficient, controlled flat fan air pattern for a uniform spray distribution. Recessed orifices protect against external damage and offer air escape should the nozzles accidentally be placed against a flat surface. Low noise levels.

**BLOWING FORCE AT 6 BAR**

300 gr.

**UGPT-7**

Comb blow compressed air

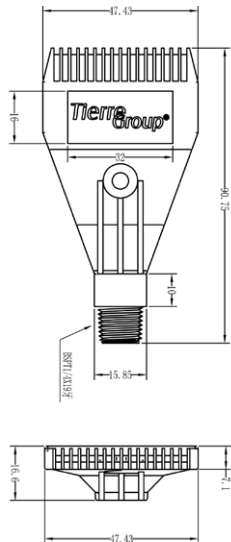

CODE	T	FLOW RATE - CAPACITY			
		0,7 Bar (10psi)	2 Bar (30psi)	4 Bar (60psi)	6 Bar (90psi)
UGPT-7	R1/4"	193 (6,8)	357 (12,8)	586 (21,3)	816 (29,6)



-25°C ÷ +85°C



10 Bar  
Exit pressure: 2,5 Bar



Compressed air



Parallel gas BSPP - G1/4"

**SUPPLY**  
Progressive



reinforced polypropylene



Products in compliance with the directive 2002/95/EC

**RoHS2**

Products in compliance with the directive 2011/65/EU

**FEATURES**

OSHA compliant 2,5 Bar. Light and sturdy body. High safety. The outlet pressure is auto-regulated at 2,5 fixed bar whatever is the inlet pressure.

**BLOWING FORCE AT 2,5 BAR**

178 gr.

**USE AT 2,5 BAR**

3,25 Nm<sup>3</sup>/h

**SONOROUS EMISSION AT 3,5 BAR**

65 dB

**CPOH**



Safety plastic air blow gun OSHA compliant

CODE	T	GR.
CPOH	G1/4"	90